


# aalco®

# 2016

## ABRIDGED

Ver. 2

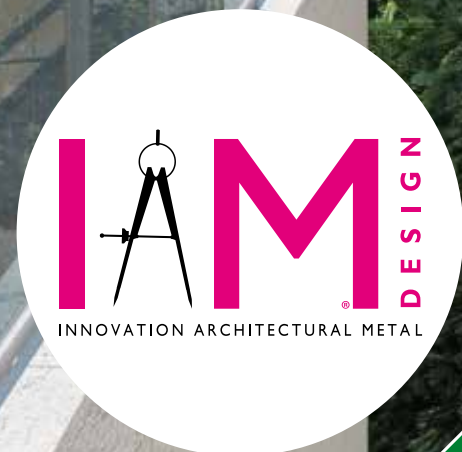



## ASK FOR YOUR COPY!

New graphics, updated contents and new focuses on the whole IAM Design products serie. 376 pages



glassu<sup>®</sup>

# TABLETOP DISPLAYS



IAM Design has designed the new tabletop display line to present GlassU products. Inside the box you will find the model you have chosen and the catalog for "Glass Railings".

GlassU 2kN  
E/PAN61



GlassU Classic  
E/PAN63



GlassU Steel  
E/PAN60




GlassU Precision  
E/PAN62




Copyright © 2016 Ind.i.a. spa. Tutti i diritti riservati. Domanda di marchio, design o brevetto depositata/registrazione o brevetto rilasciato in uno o più paesi. Per ulteriori informazioni, non esitate a contattarci a [info@iamdesign.com](mailto:info@iamdesign.com).  
Copyright © 2016 Ind.i.a. spa. All rights reserved. Trademark, design or patent application pending/registration or patent granted in one or more countries. For additional information, please contact us at [info@iamdesign.com](mailto:info@iamdesign.com).

## 2 kN FLOOR FIXING PROFILE




ALUMINIUM	Description
E1800130	Aluminium support for floor anchorage




AISI316
E1999001




ALUMINIUM
E1800215




AISI316
E1800240




ALUMINIUM
E1800350

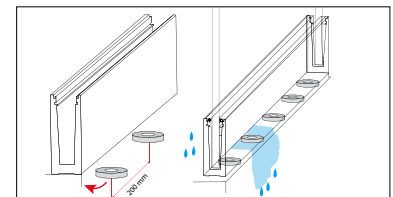


## 2 kN WALL FIXING PROFILE

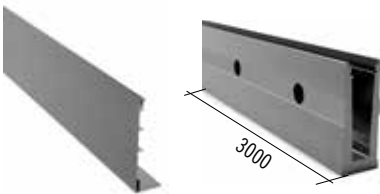

ALUMINIUM	Description
E1800140	Aluminium support for wall anchorage with cover



AISI316
E1999002




AISI316
E1999003

## GLASS FIXING ACCESSORIES



Description
E40588 Tool for insertion and removal of the wedges from the profile




x 4 pc.



x 4 pc.

Fixing kit for 1 metre baluster

PLASTIC	Glass thickness
E1804600	12.76 mm
E1807600	13.52 mm
E1808600	15 mm
E1809600	16.76 mm
E1805600	17.52 mm
E1806600	20.76 - 21.52 mm





Closing gaskets

RUBBER	Glass thickness	L
E1804620	12.76-13.52 mm	30 m
E1803620	16.76-17.52 and 19 mm	30 m
E1806620	20.76 e 21.52 mm	30 m


For 15-mm-thick glass, use the rubbers as shown in the graphic.

side A E1804620  
side B E1803620

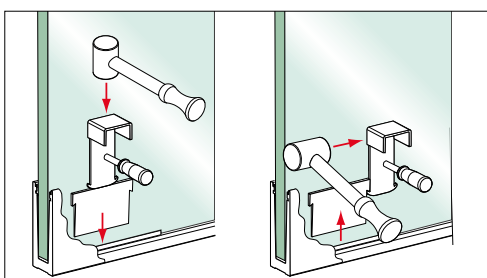

RUBBER	A	B	L
E1999004	45 mm	10.5 mm	500 mm


## 3 kN FLOOR FIXING PROFILE




ALUMINIUM	Description
E1800120	Aluminium support for floor anchorage



ALUMINIUM	
E1800210	



ALUMINIUM	
E1800340	




AISI316	
E1800220	




GALVANISED IRON	
E1800340	

## 3 kN WALL FIXING PROFILE



ALUMINIUM	Description
E1800115	Aluminium support for wall anchorage



ALUMINIUM	
E1800330	



ALUMINIUM	
E1800210	





GALVANISED IRON	
E1800300	




GALVANISED IRON	
E1800500	

## GLASS FIXING ACCESSORIES



Fixing kit for 1 metre baluster

PLASTIC	Glass thickness
E1801600	20.76 and 21.52 mm
E1802600	24.76 and 25.52 mm
E1803600	31.52 mm



Closing gaskets

RUBBER	Glass thickness	L
E1801620	20.76 and 21.52 mm	30 m
E1802620	24.76 and 25.52 mm	30 m
E1803620	31.52 mm	30 m



	Description
E40588	Tool for insertion and removal of the wedges from the profile






AISI304	AISI316	Tube
E1000424	E1000424	Ø 42.4 x 1.5 x 6000 mm
E1000483	E1100483	Ø 48.3 x 1.5 x 6000 mm



AISI316	Tube
E1500100	Ø 42.4 x 1.5 mm
E1500110	Ø 48.3 x 1.5 mm



AISI316	Tube
E1400100	Ø 42.4 x 1.5 mm
E1400110	Ø 48.3 x 1.5 mm



AISI316	Tube
E1200100	Ø 42.4 x 1.5 mm
E1200110	Ø 48.3 x 1.5 mm



AISI316	Tube
E1510100	Ø 42.4 x 1.5 mm
E1510110	Ø 48.3 x 1.5 mm



AISI316	Tube
E1520100	Ø 42.4 x 1.5 mm
E1520110	Ø 48.3 x 1.5 mm



AISI316	Tube
E1100100	Ø 42.4 x 1.5 mm
E1100110	Ø 48.3 x 1.5 mm



AISI316	Tube
E1110100	Ø 42.4 x 1.5 mm
E1110110	Ø 48.3 x 1.5 mm



Also available in groups of 6 metres

RUBBER	Tube	Glass	Coil length
E1999100	Ø 42.4 mm	8 - 10.76 mm	24 m
E1999200	Ø 42.4 mm	12 - 16.76 mm	24 m
E1999300	Ø 42.4 mm	16.76 - 18 mm	24 m
E1999400	Ø 48.3 mm	8 - 12.76 mm	24 m
E1999500	Ø 48.3 mm	13 - 17.52 mm	24 m
E1999650	Ø 48.3 mm	18 - 21.52 mm	24 m



Ask for our complete catalogue

[www.aalco.co.uk](http://www.aalco.co.uk)




## • Glass Clamps


IAM Design's range includes many clamps in different shapes and sizes to suit different designs and installations. They are available in a range of materials: AISI316, AISI304, Zamac and, upon request, polished mirror finish. They are provided with SEPARATE RUBBERS to match the clamp with the correct rubber for the glass thickness specified. Being a modular system, it enables the combining of different elements to obtain the most suitable result for any project. The coding of the components reflects this modularity and makes it easy to identify the different features.




### HOW TO READ THE GLASS CLAMPS' CODES

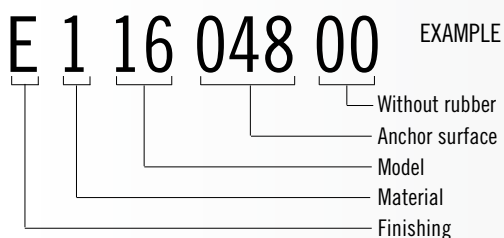

### HOW TO READ THE CODES OF THE GLASS CLAMPS' RUBBERS

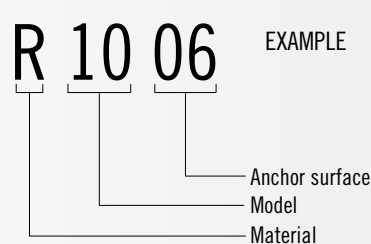

## MOD. 10



Glass clamps are supplied without rubbers in boxes of 4




AISI304 SATIN	For tube Dia.
E 1 10 000 00	Flat surface
E 1 10 033 00	33.7 mm
E 1 10 042 00	42.4 mm

AISI316 SATIN	For tube Dia.
E 2 10 000 00	Flat surface
E 2 10 033 00	33.7 mm
E 2 10 042 00	42.4 mm

RUBBER	MOD.	Nr. Set	Nr. per Set	Glass thick.
R 10 06	10	4	2 pcs.	6 mm
R 10 08	10	4	2 pcs.	8 mm

## MOD. 11

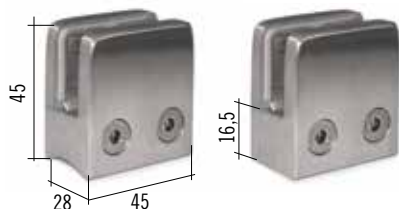

Glass clamps are supplied without rubbers in boxes of 4




AISI304 SATIN	For tube Dia.
E 1 11 000 00	Sup. piana - Flat surface
E 1 11 042 00	42.4 mm
E 1 11 048 00	48.3 mm

AISI316 SATIN	For tube Dia.
E 2 11 000 00	Flat surface
E 2 11 042 00	42.4 mm
E 2 11 048 00	48.3 mm

RUBBER	MOD.	Nr. Set	Nr. per Set	Glass thick.
R 11 06	11	4	2 pcs.	6 mm
R 11 08	11	4	2 pcs.	8 mm
R 11 10	11	4	2 pcs.	10 mm

## MOD. 12

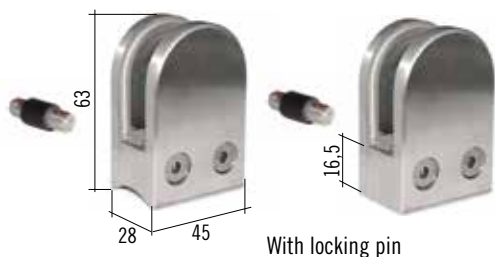

Glass clamps are supplied without rubbers in boxes of 4




AISI304 SATIN	For tube Dia.
E 1 12 000 00	Flat surface
E 1 12 042 00	42.4 mm
E 1 12 048 00	48.3 mm

AISI316 SATIN	For tube Dia.
E 2 12 000 00	Flat surface
E 2 12 042 00	42.4 mm
E 2 12 048 00	48.3 mm

RUBBER	MOD.	Nr. Set	Nr. per Set	Glass thick.
R 12 06	12	4	2 pcs.	6 mm
R 12 08	12	4	2 pcs.	8 mm
R 12 10	12	4	2 pcs.	10 mm

MOD. 13

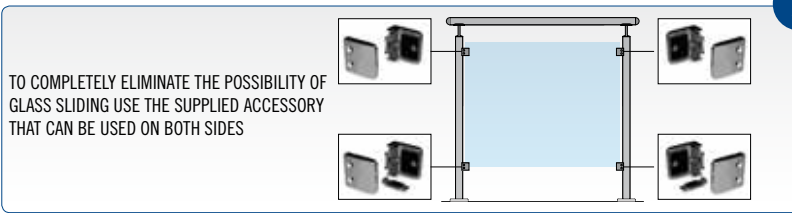

Glass clamps are supplied without rubbers in boxes of 4



AISI304 SATIN					For tube Dia.
E	1	13	000	00	Flat surface
E	1	13	048	00	48.3 mm

AISI316 SATIN					For tube Dia.
E	2	13	000	00	Flat surface
E	2	13	048	00	48.3 mm

RUBBER	MOD.	Nr. Set	Nr. per Set	Glass thick.
R 13 12	13	4	2 pcs.	12 mm
R 13 15	13	4	2 pcs.	15 mm

MOD. 14



Glass clamps are supplied without rubbers in boxes of 4





AISI304 SATIN					For tube Dia.
E	1	14	000	00	Flat surface
E	1	14	042	00	42.4 mm
E	1	14	048	00	48.3 mm

AISI316 SATIN					For tube Dia.
E	2	14	000	00	Flat surface
E	2	14	042	00	42.4 mm
E	2	14	048	00	48.3 mm

RUBBER	MOD.	Nr. Set	Nr. per Set	Glass thick.
R 14 12	14	4	2 pcs.	12 mm

MOD. 15

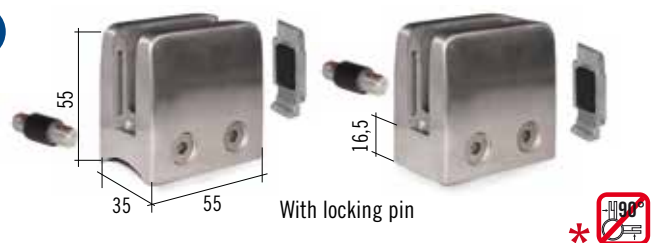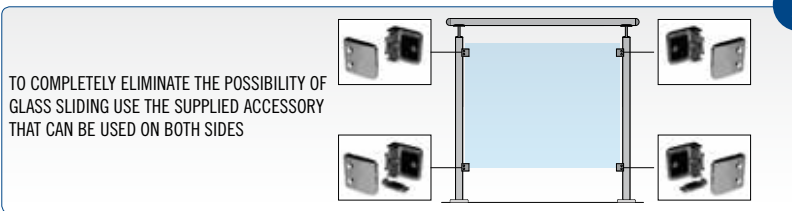

Glass clamps are supplied without rubbers in boxes of 4



AISI304 SATIN					For tube Dia.
E	1	15	000	00	Flat surface
E	1	15	*042	00	42.4 mm
E	1	15	048	00	48.3 mm

AISI316 SATIN					For tube Dia.
E	2	15	000	00	Flat surface
E	2	15	*042	00	42.4 mm
E	2	15	048	00	48.3 mm

RUBBER	MOD.	Nr. Set	Nr. per Set	Glass thick.
R 15 08	15	4	2 pcs.	8 mm
R 15 10	15	4	2 pcs.	10 mm
R 15 12	15	4	2 pcs.	12 mm



**B**

AISI316	Dimensions	Glass thickness
Satin Finish		
E00840	Ø 60 mm	8 mm
Mirror Polished		
X00840	Ø 60 mm	8 mm



Satin-finish stainless steel fitting for use when panel is fixed to one side only

AISI316
Satin Finish
E00840/C
Mirror Polished
X00840/C



Adapter to be inserted on round clamp

AISI316	For tube
E00841	Ø 33.7 mm
E00845	Ø 38.1 mm
E00842	Ø 42.4 mm
E00844	Ø 48.3 mm
E00843	Flat surface

2 pieces in a set

To use with these article numbers:  
E00820 - E00821 - E00820316 - E00821316  
- E00830 - E00831 E00830316 - E00831316  
- E00840

RUBBER	Glass
E00840/R1	8.76 mm
E00840/R2	10 mm
E00840/R3	10.76 mm
E00840/R4	12 mm
E00840/R5	12.76 mm



**B**

- 2 side fixing plates
- 1 set of one-layer rubbers for glass
- 1 set of two-layer rubbers for glass
- 4 M6 screws


AISI304	AISI316	Glass thickness
E0099100	E0099	Adjustable

Adapters to combine with side plates.  
Stainless steel pin included


AISI316	For tube	Glass thickness
E99P8	Flat surface	8 - 8.76 mm
E9933P8	Ø 33.7 mm	8 - 8.76 mm
E9942P8	Ø 42.4 mm	8 - 8.76 mm
E9950P8	Ø 50.8 mm	8 - 8.76 mm
E99P10	Flat surface	10 - 10.76 mm
E9933P10	Ø 33.7 mm	10 - 10.76 mm
E9942P10	Ø 42.4 mm	10 - 10.76 mm
E9950P10	Ø 50.8 mm	10 - 10.76 mm
E99P12	Flat surface	12 - 12.76 mm
E9933P12	Ø 33.7 mm	12 - 12.76 mm
E9942P12	Ø 42.4 mm	12 - 12.76 mm
E9950P12	Ø 50.8 mm	12 - 12.76 mm

AISI316	For tube	Glass thickness
E99P16	Flat surface	16.76 - 17.52
E9942P16	Ø 42.4 mm	16.76 - 17.52
E9950P16	Ø 50.8 mm	16.76 - 17.52
E99P20	Flat surface	20.76 - 21.52
E9942P20	Ø 42.4 mm	20.76 - 21.52
E9950P20	Ø 50.8 mm	20.76 - 21.52


**8 + 8**  
**10 + 10**




• The interchangeable clamp can be used with almost any tube!



• Lateral locking converts clamp on one side only

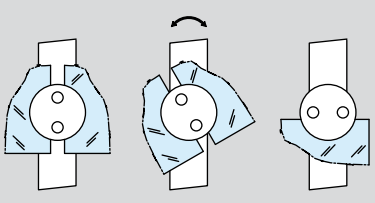

• The clamp can be rotated to meet the angle required

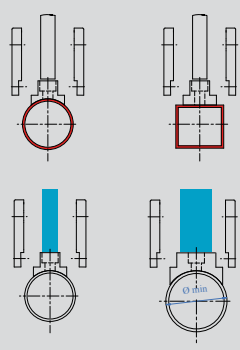

• The interchangeable clamp can be used with almost any tube!

• Maximum thickness of the glass depends on the width of the anchoring profiles


• EASY TO INSTALL • ECONOMICAL • SAFE

• EASY TO INSTALL • ECONOMICAL • SAFE







AISI304	AISI316	H	Diameter D	Glass thickness
E40930304	E40930	10 mm	30 mm	8 -16.76 mm



AISI316	H	Diameter D	Glass thickness
E40940	10 mm	50 mm	8 -16.76 mm

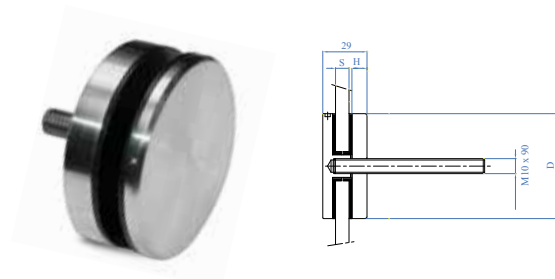

AISI316	H	Diameter D	Glass thickness
E40960	10 mm	60 mm	8 -16.76 mm




AISI304	AISI316	H	Diameter D	Glass thickness
E40900304	E40900	40 mm	30 mm	8 -16.76 mm
E40901304	E40901	50 mm	30 mm	8 -16.76 mm
E40902304	E40902	60 mm	30 mm	8 -16.76 mm



AISI316	H	Diameter D	Glass thickness
E40910	40 mm	50 mm	8 -17.52 mm
E40911	50 mm	50 mm	8 -17.52 mm
E40912	60 mm	50 mm	8 -17.52 mm



AISI316	H	Diameter D	Glass thickness
E40920	40 mm	60 mm	8 -17.52 mm
E40921	50 mm	60 mm	8 -17.52 mm
E40922	60 mm	60 mm	8 -17.52 mm

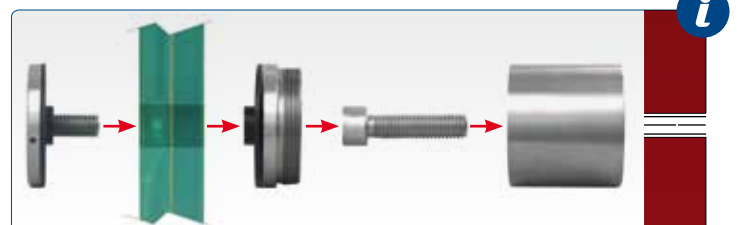




AISI316	D	Outer holes	Central hole
E0700316	∅ 100 x 6 mm	3 x ∅ 9 mm	∅ 13 mm




AISI316	Dimensions	Outer holes	Central hole
E4756	∅ 120 x 6 mm	3 x ∅ 11 mm	∅ 43 mm
E4757	∅ 120 x 6 mm	3 x ∅ 11 mm	∅ 49 mm



AISI304	AISI316	For tube
-	E116316	∅ 42.4 x 2.0 mm
E118	-	∅ 48.3 x 2.0 mm



AISI316	Dimensions	Outer holes	Central hole
E40820	∅ 100 x 16 mm	3 x ∅ 11 mm	∅ 43 mm
E40830	∅ 100 x 16 mm	3 x ∅ 11 mm	∅ 49 mm



AISI316	For tube
E406	∅ 42.4 x 2.0 mm
E406/26	∅ 42.4 x 2.5 mm
E407	∅ 48.3 x 2.0 mm
E407/26	∅ 48.3 x 2.5 mm



AISI316	For tube
E40350/26	∅ 42.4 x 2.5 mm
E40360	∅ 48.3 x 2.0 mm
E40360/26	∅ 48.3 x 2.5 mm



AISI316	Dimensions	For tube
E403	∅ 100 x 6 mm and 3 holes ∅ 11 mm	∅ 42.4 x 2.0 mm
E403/26	∅ 100 x 6 mm and 3 holes ∅ 11 mm	∅ 42.4 x 2.5 mm
E0214316	∅ 100 x 6 mm and 4 holes ∅ 11 mm	∅ 48.3 x 2.0 mm
E0214316/26	∅ 100 x 6 mm and 4 holes ∅ 11 mm	∅ 48.3 x 2.5 mm



AISI316	For tube
E40310	∅ 42.4 x 2.0 mm
E40310/26	∅ 42.4 x 2.5 mm
E40320	∅ 48.3 x 2.0 mm
E40320/26	∅ 48.3 x 2.5 mm



AISI316	Dimensions	Hole	Height
E4072	∅ 105 mm	∅ 43.0 mm	15 mm
E4072/C	∅ 105 mm	∅ 43.0 mm	25 mm
E4073	∅ 105 mm	∅ 49.0 mm	25 mm



AISI316	Dimensions	Hole	Height
X4072	∅ 105 mm	∅ 43 mm	15 mm



**B**



AISI304	AISI316	For tube
E031/S1	E031/S1316	∅ 42.4 x 2.0 mm
-	E031/S1316/26	∅ 42.4 x 2.5 mm
0312	E0312316	∅ 48.3 x 2.0 mm
-	E0312316/26	∅ 48.3 x 2.5 mm



**B**




AISI303	AISI316	For tube
E030/S	E030/S316	∅ 42.4 x 2.0 mm
-	E030/S316/26	∅ 42.4 x 2.5 mm
E0302	E0302316	∅ 48.3 x 2.0 mm
-	E0302316/26	∅ 48.3 x 2.5 mm



**B**

AISI304
E0223



**B**

AISI304	Dimensions
E034100	66 x 82 mm

**MIRROR POLISHED**



3 pieces complete with screws



AISI316	For tube
X031/S1316	∅ 42.4 x 2.0 mm

**MIRROR POLISHED**




3 pieces complete with screws



AISI316	For tube
X030/S316	∅ 42.4 x 2.0 mm

**MIRROR POLISHED**



AISI316	For tube
X02231316	∅ 42.4-∅ 43 mm


**MIRROR POLISHED**



AISI316	For tube
X0223316	∅ 42.4-∅ 43 mm



AISI316	For tube
E022/S316	∅ 33.7 mm - ∅ 42.4 mm



AISI316	For tube
E459	∅ 42.4 mm



Tube adapter with a satin finish




AISI316	For tube	Height H
E491/26	∅ 42.4 x 2.5 mm	12 mm
E492/26	∅ 48.3 x 2.5 mm	14 mm




**B**



AISI303	For tube
E038900	∅ 42.4 x 2.0 mm



AISI304	AISI316	Description	S
E035200	E035200316	For glass thickness 8-22 mm Glass to be drilled at 21 mm dia.	



**B**

AISI304	Description	S
E035100	For glass thickness 8-22 mm Glass to be drilled at 21 mm dia.	



AISI316	For tube	A
E203	Ø 42.4 x 2.0 mm	50 mm
E203/26	Ø 42.4 x 2.5 mm	50 mm
E2032	Ø 48.3 x 2.0 mm	50 mm
E2032/26	Ø 48.3 x 2.5 mm	50 mm



AISI316	For tube	A
E2035	Ø 42.4 x 2.0 mm	89 mm
E2035/26	Ø 42.4 x 2.5 mm	89 mm
E2037	Ø 48.3 x 2.0 mm	90 mm
E2037/26	Ø 48.3 x 2.5 mm	90 mm



AISI316	For tube	A
E453	Ø 42.4 x 2.0 mm	100 mm
E453/26	Ø 42.4 x 2.5 mm	100 mm
E2042	Ø 48.3 x 2.0 mm	88 mm
E2042/26	Ø 48.3 x 2.5 mm	88 mm



AISI316	For tube	A
E440	Ø 42.4 x 2.0 mm    Ø 33.7 x 2.0 mm	



AISI316	For tube	A
E2045	Ø 42.4 x 2.0 mm	87 mm
E2045/26	Ø 42.4 x 2.5 mm	87 mm
E2047	Ø 48.3 x 2.0 mm	91 mm
E2047/26	Ø 48.3 x 2.5 mm	91 mm



AISI316	For tube
E456	Ø 42.4 mm
E2067	Ø 48.3 mm
E2068	Ø 60.3 mm




Satin-finish tube adapter

AISI316	For tube A
E454	Ø 42.4 x 2.0 mm
E454/26	Ø 42.4 x 2.5 mm
E2052	Ø 48.3 x 2.0 mm
E2052/26	Ø 48.3 x 2.5 mm



AISI316	For tube
E5588/26	Ø 48.3 x 2.5 mm






AISI316	For tube	A
E2015	Ø 42.4 x 2.0 mm	50 mm
E2015/26	Ø 42.4 x 2.5 mm	50 mm
E2017	Ø 48.3 x 2.0 mm	55 mm
E2017/26	Ø 48.3 x 2.5 mm	55 mm

AISI316	For tube	A
E451	Ø 42.4 x 2.0 mm	65 mm
E451/26	Ø 42.4 x 2.5 mm	65 mm
E2012	Ø 48.3 x 2.0 mm	67 mm
E2012/26	Ø 48.3 x 2.5 mm	67 mm


AISI316	For tube
E4561	Ø 42.4 x 2.0 mm



AISI304	AISI316	For tube
E455/304	E455	Ø 42.4 x 2.0 mm
-	E455/26	Ø 42.4 x 2.5 mm
-	E2062	Ø 48.3 x 2.0 mm
-	E2062/26	Ø 48.3 x 2.5 mm

AISI316	For tube
X455	Ø 42.4 x 2.0 mm

AISI316	For tube	A	B
E4566	Ø 42.4 x 2.0 mm	Ø 84 mm	Ø 80 mm
E4567	Ø 48.3 x 2.0 mm	Ø 95 mm	Ø 85 mm

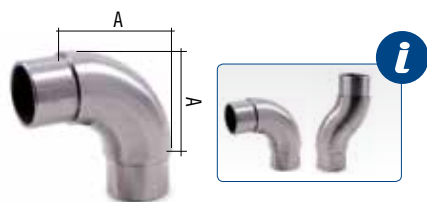

AISI316	For tube	A
E447/26	Ø 33.7 x 2.5 mm	59.5 mm
E4471	Ø 42.4 x 2.0 mm	66 mm
E4471/26	Ø 42.4 x 2.5 mm	66 mm
E4472	Ø 48.3 x 2.0 mm	74 mm
E4472/26	Ø 48.3 x 2.5 mm	74 mm
E4473/26	Ø 60.3 x 2.5 mm	83 mm

AISI316	For tube	A
E450	Ø 42.4 x 2.0 mm	65 mm
E450/26	Ø 42.4 x 2.5 mm	65 mm
E2002	Ø 48.3 x 2.0 mm	73 mm
E2002/26	Ø 48.3 x 2.5 mm	73 mm

AISI316	For tube
E4562	Ø 48.3 x 2.0 mm



**MIRROR POLISHED**

AISI316	For tube	A
E446	Ø 42.4 x 2.0 mm	53 mm
E4461	Ø 42.4 x 2.5 mm	53 mm
E4462	Ø 48.3 x 2.0 mm	59 mm
E4463	Ø 48.3 x 2.5 mm	59 mm

AISI316	For tube	A
X450	Ø 42.4 x 2.0 mm	65 mm



**MIRROR POLISHED**

90° angle

AISI316	For tube	A
X451	Ø 42.4 x 2.0 mm	65 mm



AISI303	For tube
E01151	Ø 42.4 x 2.0 mm
E01151/26	Ø 42.4 x 2.5 mm
E01152	Ø 48.3 x 2.0 mm
E01152/26	Ø 48.3 x 2.5 mm



AISI316	For tube	H
E4141	Ø 42.4 x 2.0 mm	9 mm
E4142	Ø 48.3 x 2.0 mm	9 mm



AISI316	For tube
E4110	Ø 42.4 x 2.0 mm



AISI316	For tube	B x C
E481	Ø 42.4 x 2.0 mm	60 x 80 mm
E482	Ø 48.3 x 2.0 mm	75 x 100 mm

ROUNDED, SOLID END CAPS FOR TUBE



AISI316	For tube	H
E4144	Ø 42.4 x 2.0 mm	9 mm
E011961316	Ø 48.3 x 2.0 mm	10 mm

ROUNDED, HOLLOW END CAPS FOR TUBE



AISI316	For tube	H
E4130/26	Ø 42.4 x 2.5 mm	7 mm
E4136/26	Ø 48.3 x 2.5 mm	7 mm

SEMI-SPHERICAL END CAPS



Hollow, satin finish

AISI316	For tube
E464/26	Ø 33.7 x 2.5 mm
E465	Ø 42.4 x 2.0 mm
E465/26	Ø 42.4 x 2.5 mm
E466	Ø 48.3 x 2.0 mm
E466/26	Ø 48.3 x 2.5 mm
E467/26	Ø 60.3 x 2.5 mm

PRESSURE LOCKED END CAPS



AISI316	For tube	Tube thickness
E316	Ø 42.4 mm	1.5 - 2.5 mm
E317	Ø 48.3 mm	1.5 - 2.5 mm



AISI316	For tube	H
E4120	Ø 42.4 x 2.0 mm	9 mm
E4120/26	Ø 42.4 x 2.5 mm	9 mm
E4135/26	Ø 48.3 x 2.5 mm	9 mm




MIRROR POLISHED

AISI316	For tube
X465	Ø 42.4 x 2.0 mm




AISI316	For tube
E452	Ø 42.4 x 2.0 mm



AISI316	For tube	Hole A
E4040	Ø 42.4 mm	Ø 14.2 mm through
E4041	Ø 48.3 mm	Ø 12.2 mm through
E4044	Flat face	Ø 12.2 mm through


SCREWS

Hexagon socket countersunk flat head screw  
UNI 5933 / DIN 7991



<b>AISI316</b>	Thread
E0385316	M5 x 25

Hexagon socket head cap screw  
UNI 5931 / DIN 912 /ISO 4762



<b>AISI316</b>	Thread
E0323316	M8 x 20

Cross recessed countersunk flat head screw (for wood) DIN 7505A



<b>AISI316</b>	Thread
E0382316	5 x 20

PRODUCTS TO CLEAN STAINLESS STEEL



Passivating paste that helps to create a protective coating on stainless steel

Art. no.

E4051



Protective spray that leaves an anti-static and water repellent finish

Art. no.

E4052



High strength adhesive

Art. no.

E4054



Cleaning solution formulated to remove rust spots from the surface of stainless steel and return the material to its original finish

Art. no.

E4052/D



Passivating paste that helps to create a protective coating on stainless steel

Art. no.

E4052/P



HOW TO TREAT OXIDISED STAINLESS STEEL

Stainless steel is an extremely durable material, however, occasional maintenance is recommended to retain its appearance and prevent 'rust spotting' or staining. Aalco offers a range of specially-developed cleaning agents that, when used, will extend the life and preserve the appearance of stainless steel.



Example of a stainless steel picket polluted by external agents like dust and smog



Application of the de-rusting product E4052/D: all polluted parts must be covered



Application of the passivating product E4052/P: the polluted component must entirely be covered



Result of the application of Ind.i.a. spa's de-rusting and passivating products

Aalco will be displaying IAM Design Stainless Steel Handrail Systems in London on 23-25 September. Come and see the products and talk to the experts



- PRODUCT TO BE GLUED WITH E4054
- PLASTIC HAMMER TO BE USED
- TESTED FOR A RESISTANCE OVER 3 kN/m
- ANTI-CLIMB PRODUCT
- PRODUCT TO BE WELDED
- SUPER STRONG, HIGH RESISTANCE PRODUCT
- TESTED FOR A RESISTANCE OVER 2 kN/m
- POWDER COATED. DIFFERENT COLOURS AVAILABLE UPON REQUEST
- ASSEMBLY WITH ALLEN KEY
- BEST PRICED PRODUCT IN THE RANGE
- NEW PRODUCT

[www.aalco.co.uk](http://www.aalco.co.uk)  
[www.iamdesign.com](http://www.iamdesign.com)

**ABERDEEN**

Tel 01224 854810  
Fax 01224 871982  
e-mail aberdeen@aalco.co.uk

**ESSEX**

Tel: 01268 884200  
Fax: 01268 884220  
email: essex@aalco.co.uk

**NEWCASTLE**

Tel 0191 491 1133  
Fax 0191 491 1177  
e-mail newcastle@aalco.co.uk

**AYLESBURY**

Tel 01296 461700  
Fax 01296 339923  
e-mail aylesbury@aalco.co.uk

**GLASGOW**

Tel 0141 646 3200  
Fax 0141 646 3260  
e-mail glasgow@aalco.co.uk

**NORWICH**

Tel 01603 787878  
Fax 01603 789999  
e-mail norwich@aalco.co.uk

**BELFAST**

Tel 028 9083 8838  
Fax 028 9083 7837  
e-mail belfast@aalco.co.uk

**HULL**

Tel 01482 626262  
Fax 01482 626263  
e-mail hull@aalco.co.uk

**NOTTINGHAM**

Tel 0115 988 2600  
Fax 0115 988 2636  
e-mail nottingham@aalco.co.uk

**BIRMINGHAM**

Tel 0121 585 3600  
Fax 0121 585 7837  
e-mail birmingham@aalco.co.uk

**LEEDS**

Tel 0113 276 3300  
Fax 0113 276 0382  
e-mail leeds@aalco.co.uk

**SOUTHAMPTON**

Tel 023 8087 5200  
Fax 023 8087 5275  
e-mail southampton@aalco.co.uk

**CHEPSTOW**

Tel 01291 638638  
Fax 01291 638600  
e-mail chepstow@aalco.co.uk

**LIVERPOOL**

Tel 0151 207 3551  
Fax 0151 207 2657  
e-mail liverpool@aalco.co.uk

**STOKE**

Tel 01782 375700  
Fax 01782 375701  
e-mail stoke@aalco.co.uk

**DYFED**

Tel 01269 842044  
Fax 01269 845276  
e-mail dyfed@aalco.co.uk

**MANCHESTER**

Tel 01204 863456  
Fax 01204 863430  
e-mail manchester@aalco.co.uk

**SWANLEY**

Tel 01322 610900  
Fax 01322 610910  
e-mail swanley@aalco.co.uk



Also available  
in Ireland

**DUBLIN**

Tel +353 (0) 1 629 8600  
Fax +353 (0) 1 629 9200  
e-mail:dublin@amari-dublin.com

**CORK**

Tel +353 (0) 21 431 0520  
Fax +353 (0) 21 431 0519  
e-mail:cork@amari-cork.com